




## Multi-Function Timer


- 13 Functions
- 10 Time Ranges
- Front knobs for Time Range, Time Scale & Mode Setting
- Slim, Space Saving Design
- DIN Rail Mount

### DIMENSIONS (MILLIMETERS)

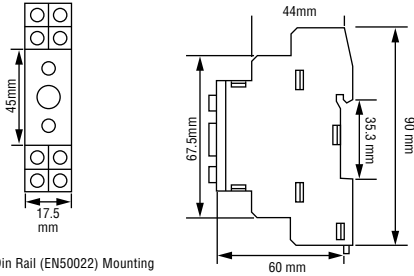

Symmetrical 35mm Din Rail (EN50022) Mounting

### TERMINAL CONNECTIONS

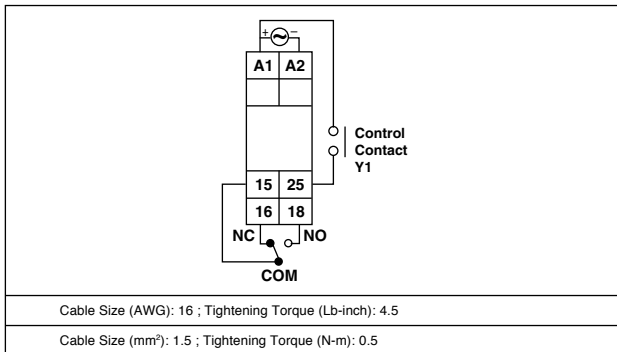


### SPECIFICATIONS

<b>ACCURACY</b>	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
<b>RESET</b>	Reset time < 100 msec
<b>OUTPUT CONTACT</b>	SPDT (1 C/O)
<b>CONTACT RATING</b>	NO/5A, NC/3A @ 250V AC
<b>MODES</b>	On delay (A) Interval (B) Cyclic equal OFF first (C) Cyclic equal ON first (Ci) Pulse output, 500ms fixed (D) Delay on break (E) Delay on make / Delay on break (F) Interval after break (H) Single shot (I) Retriggerable Single shot (J) Latching relay (K) Delay with Totalize (Ai) Interval with Totalize (Bi)
<b>TIME RANGES</b>	0.1 - 1 sec, 0.3 - 3 sec, 1-10 sec, 3-30 sec 0.1-1 min, 0.3-3 min, 1-10 min, 3-30 min 0.1-1 hr, 0.3-3 hr
<b>SUPPLY VOLTAGE</b>	20-240V AC, 12-240V DC AC : (50 / 60 Hz)
<b>POWER CONSUMPTION</b>	43.2VA max
<b>TEMPERATURE</b>	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
<b>HUMIDITY (NON-CONDENSING)</b>	95% RH
<b>WEIGHT</b>	0.163 lbs.
<b>PROTECTION LEVEL</b>	IP40 for Casing IP20 for Terminals

### ORDERING INFORMATION

<b>PART NO.</b>	<b>SUPPLY VOLTAGE</b>
175MU	20-240V AC/DC 12-240V DC

# TIMING DIAGRAMS

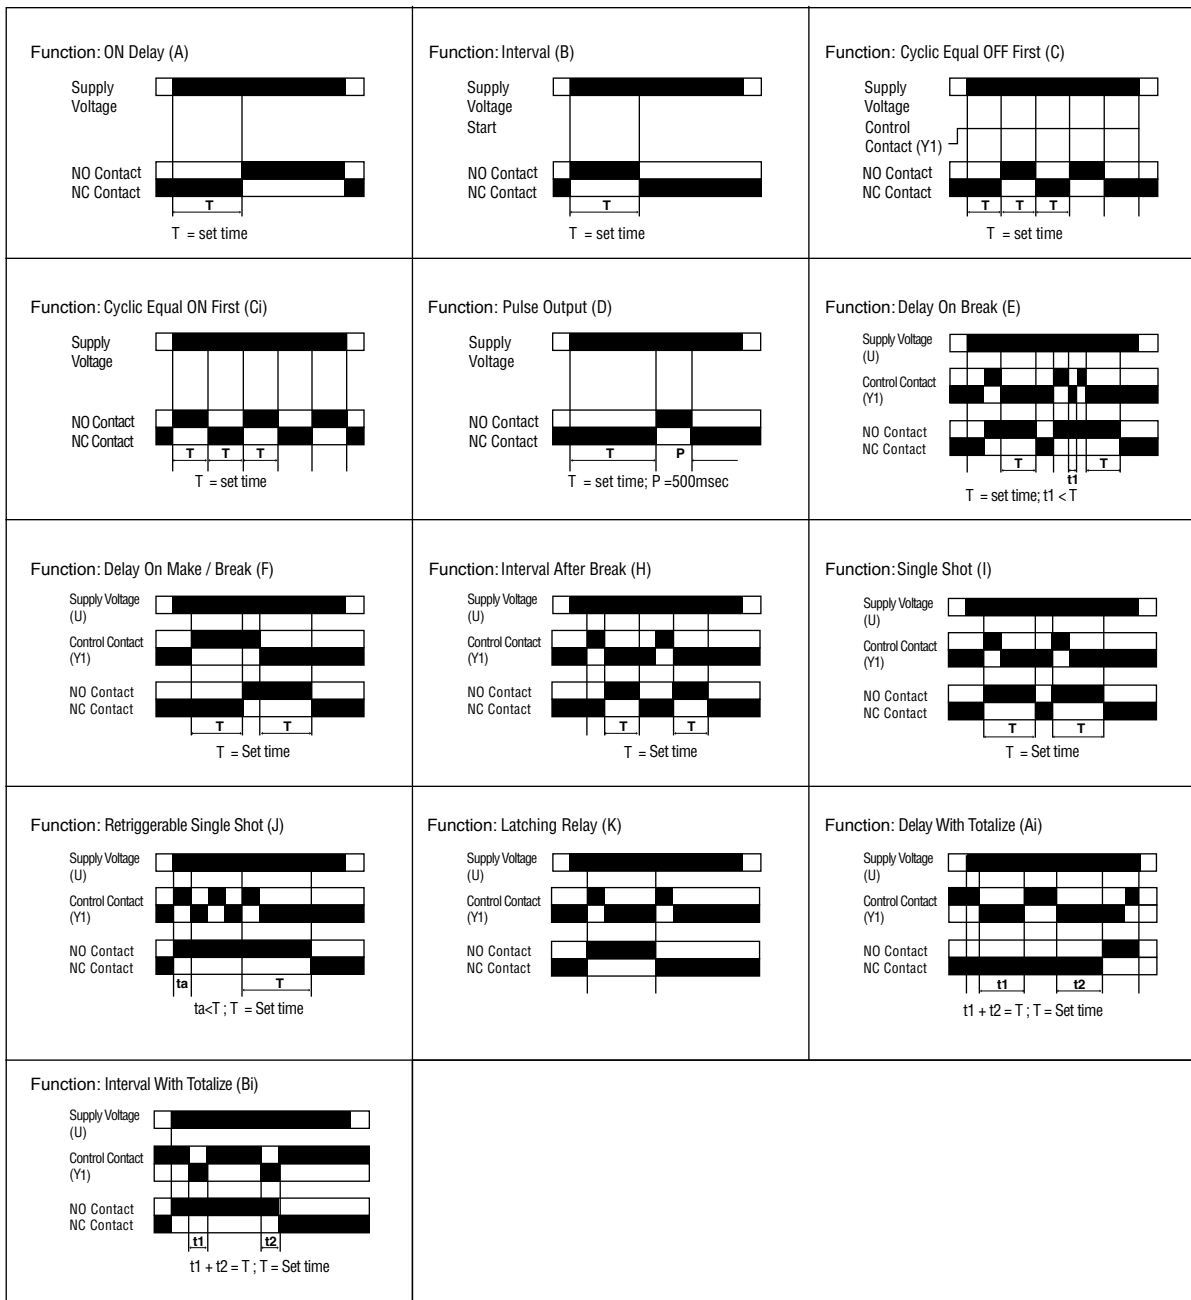



**CONNECTRIC  
SYSTEMS INC.**

28-207 Edgeley Blvd., Concord, Ontario, L4K 4B5  
 Ph: 905-669-0080      Fax: 905-669-0082  
 www.connectric.com      info@connectric.com